

Temperature Settings

0 = isolation of the radiator

* = Frost protection symbol (in this position the valve opens automatically when room temperature drops below 7°C or 44°F.)

1 = 12°C or 54°F

2 = 16°C or 61°F

3 = 20°C or 68°F

4 = 24°C or 75°F

5 = 28°C or 82°F



The minor graduations between the figures 2 - 4 represent a change of room temperature of 1°C or about 2°F.





Uni XH/XD, Direct-mounted
non-electric thermostat
Part No._____.

Job Name: _____ Submitted By: _____ Date: _____

Spec. Section: _____

Job Location: _____ Engineer/Architect: _____

Approval: _____ Date: _____

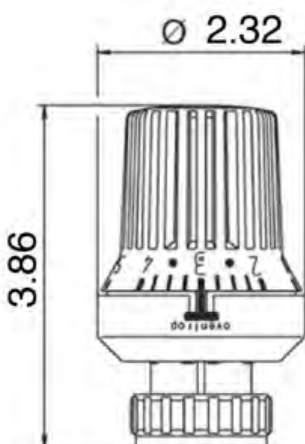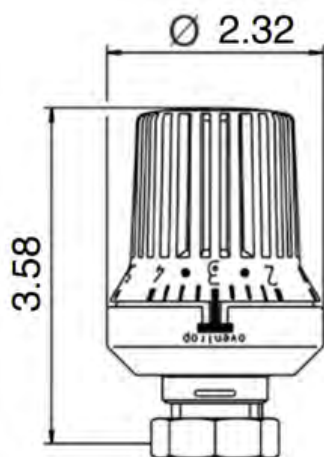

Product specification:

OVENTROP-Thermostat Uni XH with liquid sensor.

User adjusted limitation of setting. With frost protection.
Tested and approved according to EN 215.

Suitable for valves with connection thread M 30 x 1.5 as
well as integrated distributors with connection thread
M 30 x 1.5

White model

Materials:
Fiber reinforced nylon

Specifications:
Adjustment range: 45°F - 82°F (7°C - 28°C)
Settings: 0 * 1 - 5
Sensor type: Liquid
Ambient temperature range: 32°F-122°F
Maximum fluid temperature: 248°F

Items:

Direct mount, squeeze connection	
as above but with remote sensor	101 1375
capillary 6.5 ft long	101 1575
Direct mount, M30x1.5 connection	101 1365
as above but with remote sensor	
capillary 6.5 ft long	101 1565
capillary 16 ft long	101 1566

