



# oventrop

Direct Mount Non-Electric  
Thermostat Uni DH

Part No. \_\_\_\_\_

Job Name: \_\_\_\_\_


Submitted by: \_\_\_\_\_ Date: \_\_\_\_\_

Spec Section: \_\_\_\_\_

Job Location: \_\_\_\_\_

Engineer/Architect: \_\_\_\_\_

Approval: \_\_\_\_\_ Date: \_\_\_\_\_

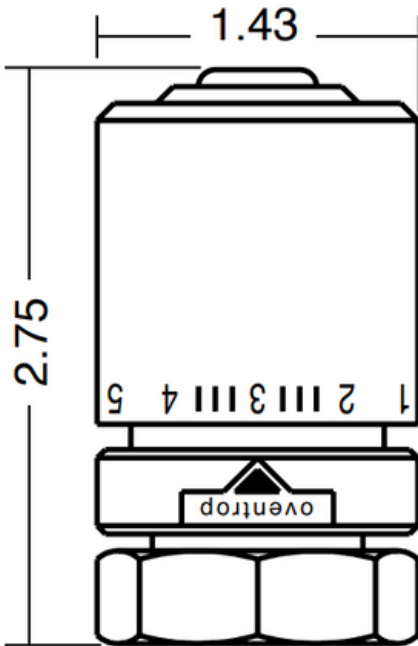

#### Product Specifications:

Direct mount thermostat with wax sensor. Ideally suited for steam applications.


Materials:  
Fiber reinforced nylon

Specifications:  
Adjustment range: 45°F - 82°F  
Settings: 0 \* 1-5  
Sensor type: Wax  
Ambient temperature range: 32°F-122°F  
Maximum fluid temperature: 248°F

Items:  
M30x1.5 connection 101 10 65

as above but with remote sensor

capillary 6.5 ft long 101 11 65

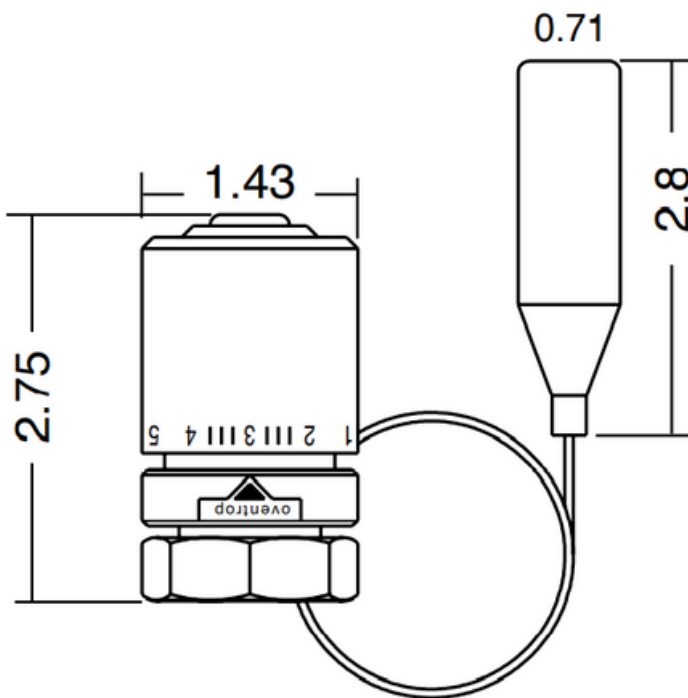

Job Name: \_\_\_\_\_

Submitted by: \_\_\_\_\_ Date: \_\_\_\_\_

\_\_\_\_\_


Spec Section: \_\_\_\_\_

Job Location: \_\_\_\_\_

Engineer/Architect: \_\_\_\_\_

\_\_\_\_\_

Approval: \_\_\_\_\_ Date: \_\_\_\_\_

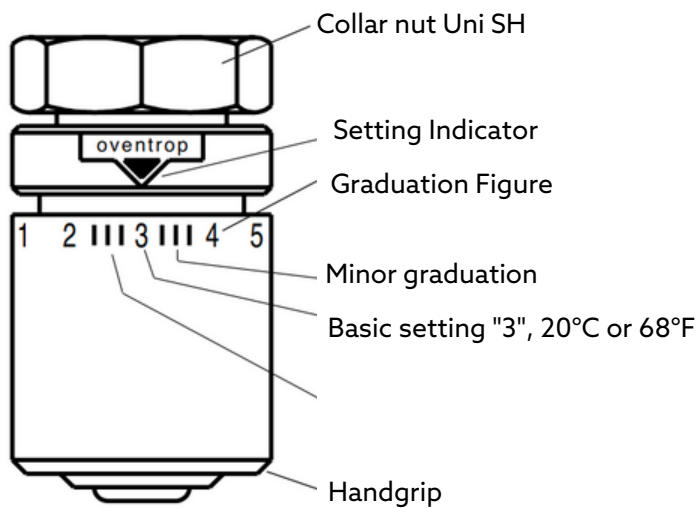

### Temperature Settings

0 = isolation of the radiator

\* = Frost protection symbol (in this position the valve opens automatically when room temperature drops below 7°C or 44°F.)

1 = 12°C or 54°F

2 = 16°C or 61°F

3 = 20°C or 68°F

4 = 24°C or 75°F

5 = 28°C or 82°F



The minor graduations between the figures 2 - 4 represent a change of room temperature of 1°C or about 2°F.