

Tender specification:

Oventrop electromotive actuator for the motorisation of "Optibal TW" ball valves DN 15-DN 25, consisting of actuator 24 V (including mounting material) with spring return and adapter set DN 15 and DN 20/DN 25.

Depending on the position of the stem of the ball valve "Optibal TW", the actuator can be installed closed with current "off" or open with current "off".


Technical data:

Application:	Potable water installations according to the German Potable Water Ordinance (TrinkwV)
Power supply:	24 V AC / DC50 / 60 Hz
Angle of rotation:	90 °C in 30 sec.
Torque:	4 Nm
Capacity:	6.0 VA / 3 W
Protection:	IP 55
Duty cycle:	Continuous cycle

Item no.: 4208890



Electromotive actuator

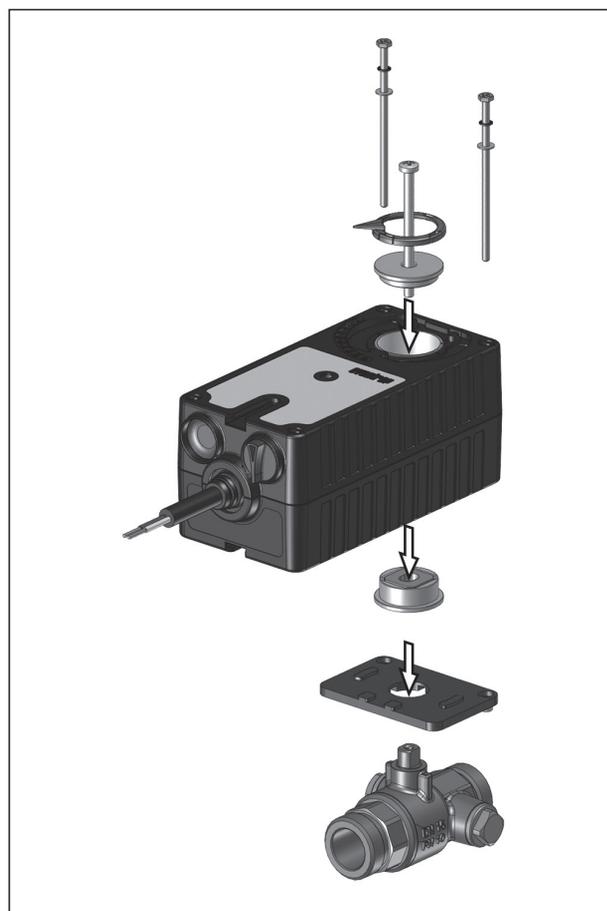

Assembly electromotive actuator and "Optibal TW"

Subject to technical modifications without notice.

Product range 12
ti 340-EN/10/MW
Edition 2016