


Job Name: _____ Submitted By: _____ Date: _____


Spec. Section: _____

Job Location: _____ Engineer/Architect: _____

Approval: _____ Date: _____

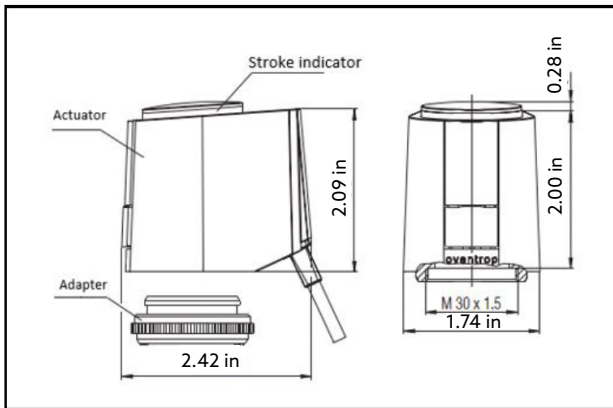

Dimensions

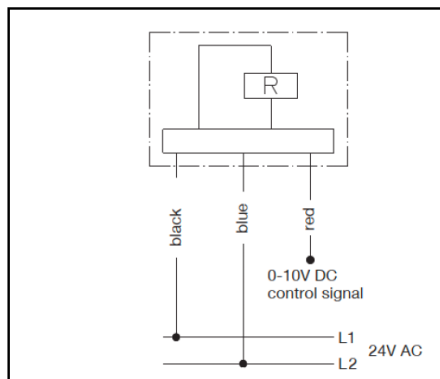

Wiring diagram

Product specification

24V powered, 0-10V proportional actuator for use with three-way mixing valves and two-way control valves.

Can be used with:

- Oventrop three-way mixing valves
- Oventrop Cocon-Q automatic balancing and control valve
- Manifold distributor

Connection:	M30x1.5 thread
Operating Voltage:	24V +40 / -10%
Control Voltage:	0 to 10VDC
Operating Capacity:	2W
Stroke:	4 mm (5/32")
Mean foating time:	30 s/mm
Spring strength:	100 N (tolerance +/-5%)
Ambient temperature:	32°F - 140°F
Connection cable:	AWG24 - 3 wire, 3 ft.

Normally closed for two-way valves