


oventrop


Innovation + Quality

Valves, controls + systems

Radia-Set
Valves and accessories for radiators
with integrated distributors

Product range

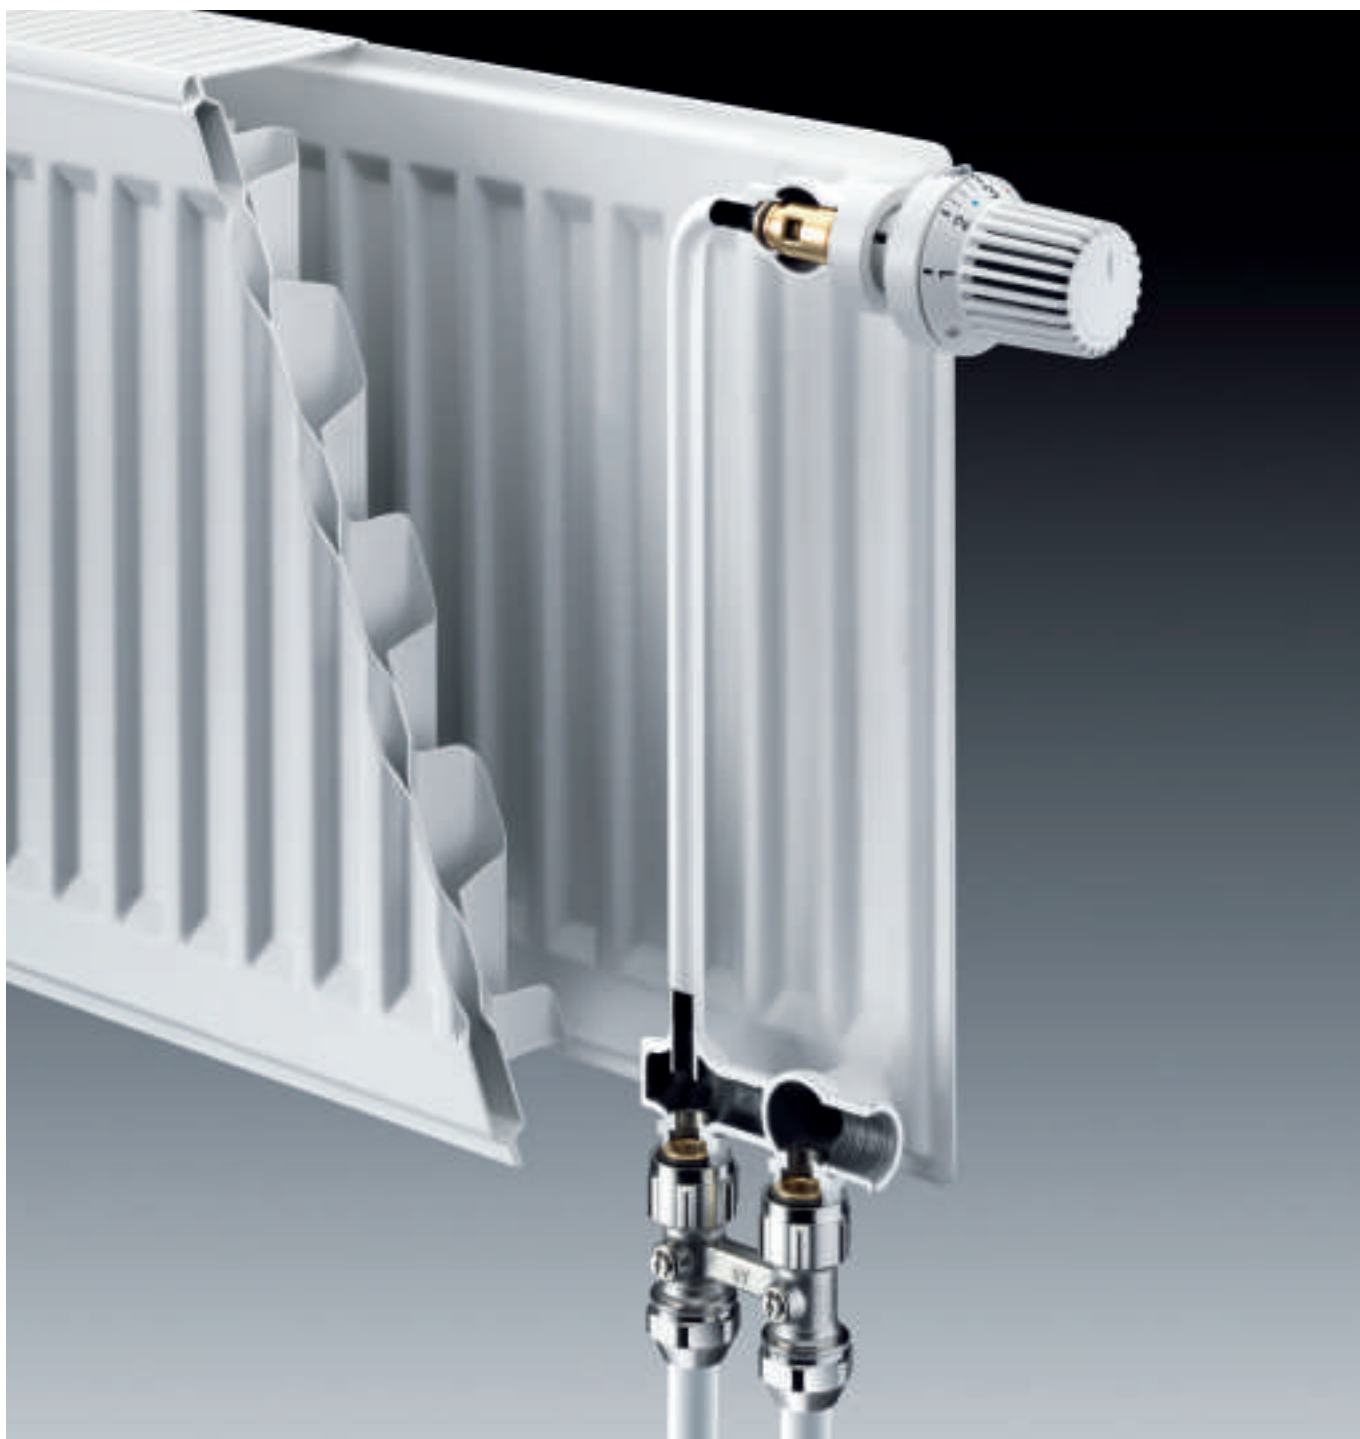

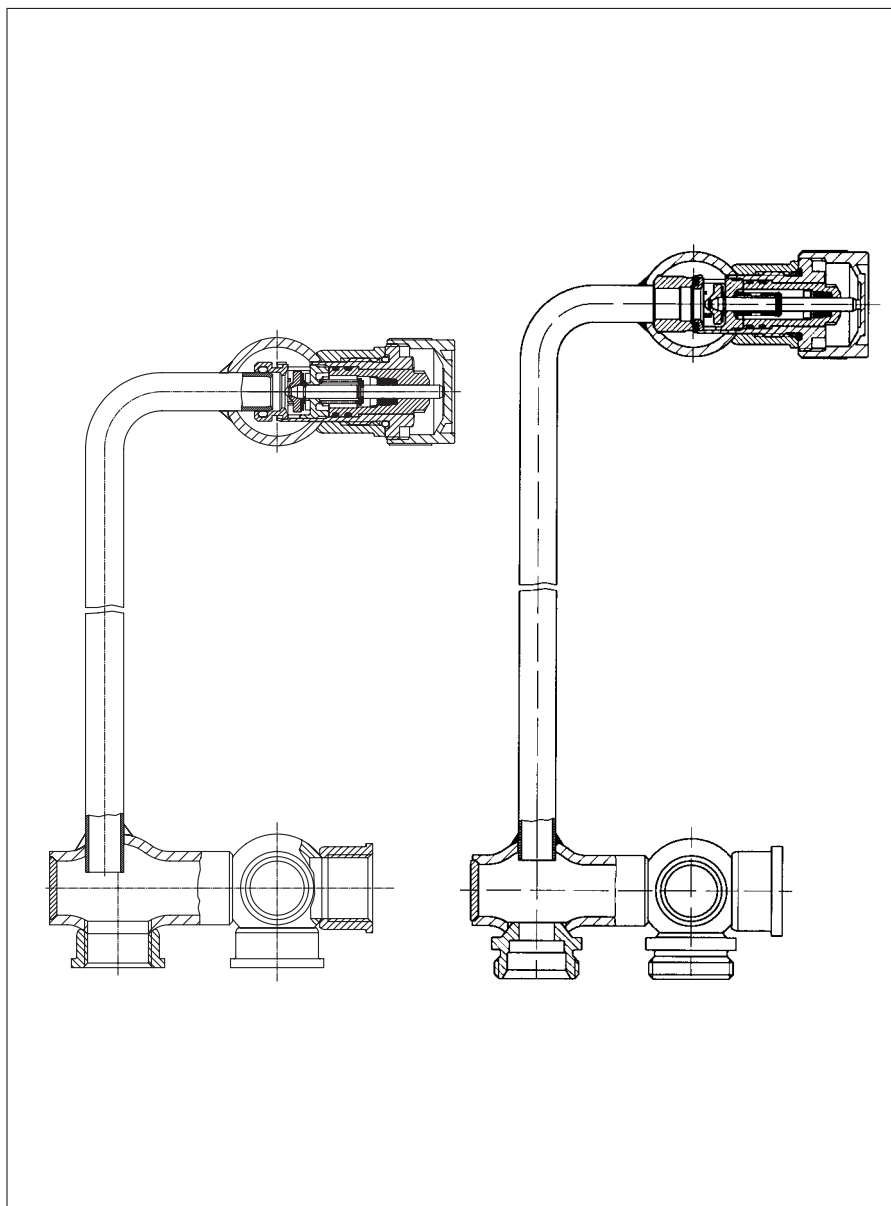

Oventrop distributor made of steel, with valve insert for thermostat connection M 30 x 1.5.


Distributor body with $\frac{1}{2}$ " female threaded or $\frac{3}{4}$ " male threaded connection.



Oventrop valve insert with connection for thermostats M 30 x 1.5 and presetting.

Advantages:

- maintenance-free, double O-ring seal
- standard flow rates and usual handling of presetting
- presetting by use of the Oventrop or Heimeier presetting key or a standard 13 mm spanner
- for all standard integrated distributors

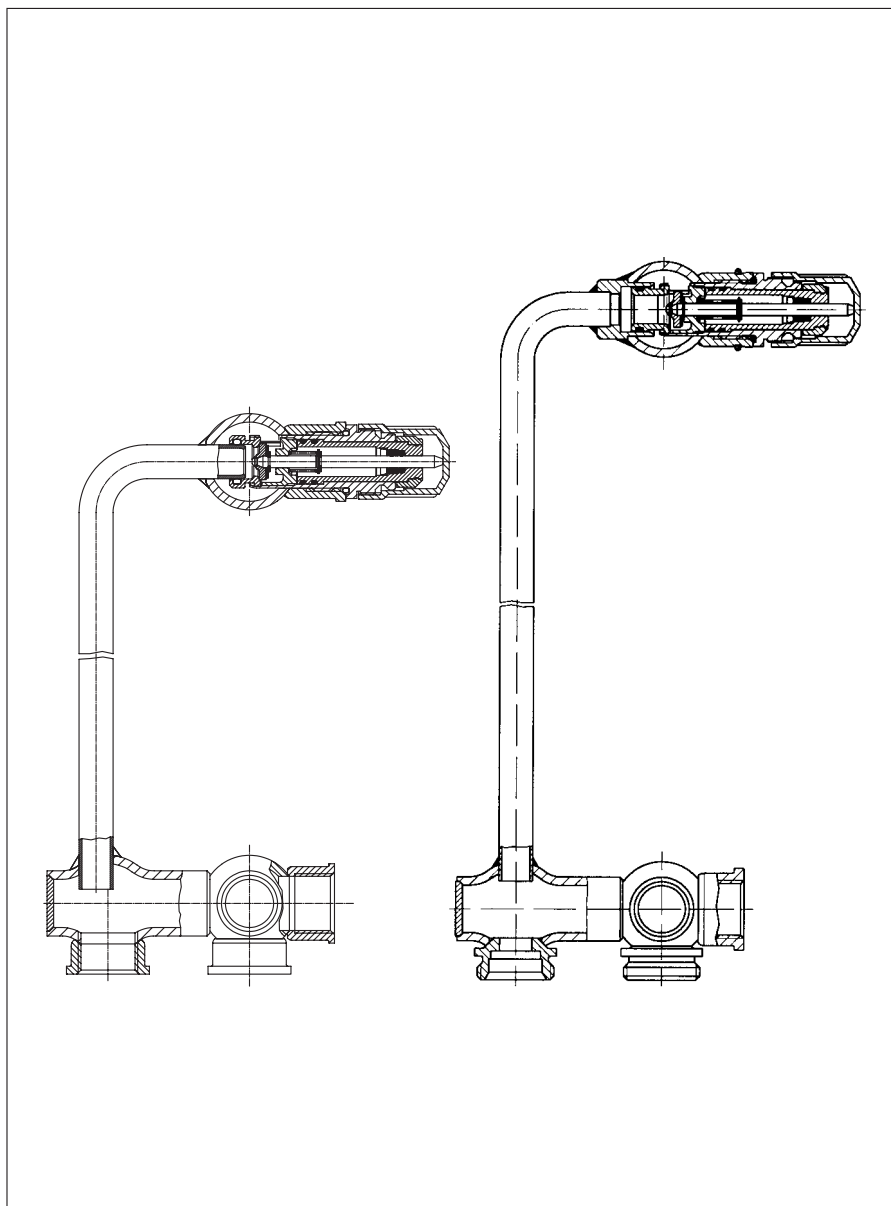

Oventrop distributor made of steel, valve insert for thermostats with squeeze connection.

Distributor body with $\frac{1}{2}$ " female or $\frac{3}{4}$ " male threaded connection.



Oventrop valve insert with squeeze connection and presetting.

Advantages:

- maintenance-free, double O-ring seal
- standard flow rates and usual handling of presetting
- high selectivity of presetting enabling precise regulation
- for all standard integrated distributors



1



2



3



4



5



6

Oventrop offers all components for standard radiators: thermostats, fittings and compression fittings for all types of pipes.

1 Thermostat "Uni XH/LH"

These thermostats are suitable without adapters for integrated distributors with thread M 30 x 1.5.

2 Thermostat "Uni XD/LD"

These thermostats are suitable without adapters for integrated distributors with squeeze connection.

3 Connection fittings "Multiflex"

With the "Multiflex" program, the radiators with integrated distributors are connected to the plastic, copper or soft steel pipework. A brass nipple is supplied with every fitting for radiators with 1/2" female thread.

Oventrop offers soft sealing fittings

"Multiflex F" (foreground) and fittings with metal to metal seal "Multiflex V" (background).

4 Single fittings "Multiflex"

Single fittings can be used on radiators with variable pipe centre distances.

5 Compression fittings for plastic pipes (outer diameter 12–21 mm) with 1/4" thread for the direct connection to the valve sets (see illustr.).

Compression fittings "Cofit" for composition pipe "Cope" (outer diameter 14, 16 or 20 mm) with 1/4" thread for the direct connection to the valve sets.

Compression fittings with metal to metal seal for copper and precision steel pipes (outer diameter 10–18 mm)

6 Computer programme for calculation of pipework, valve design and sizing of heating surfaces.

More information can be found in the Oventrop Catalogue, product range 1.

Presented by:



F. W. OVENTROP GmbH & Co. KG
Paul-Oventrop-Str. 1
D-59939 Olsberg
Germany
Telephone +49 (0) 29 62 82-0
Telefax +49 (0) 29 62 82-403
E-Mail mail@oventrop.de
Internet www.oventrop.com