

Bronze Swing Check Valves

Internal threads PN 25

DN 15...50




Threaded bronze swing check valves in sizes DN 15 to DN 50 for the installation in the supply or return of heating and cooling systems and potable water systems. With WRAS approval.


Specifications

Nominal size	DN 15 ... 50					
Versions	with internal threads to EN 10226 (BS 21)					
Operating temperature	-10 to 180 °C					
Operating pressure	PN 25					
Temperature / pressure relation	-10...100 °C 25 bar	...120°C 21.8 bar	...150°C 16.5 bar	...170°C 12.8 bar	...180°C 10.5 bar	
Medium	Heating and chilled water, potable water					
Kvs value per size	DN 15 7	DN 20 17	DN 25 23	DN 32 42	DN 40 72	DN 50 149

Dimensions, Item Numbers and Materials

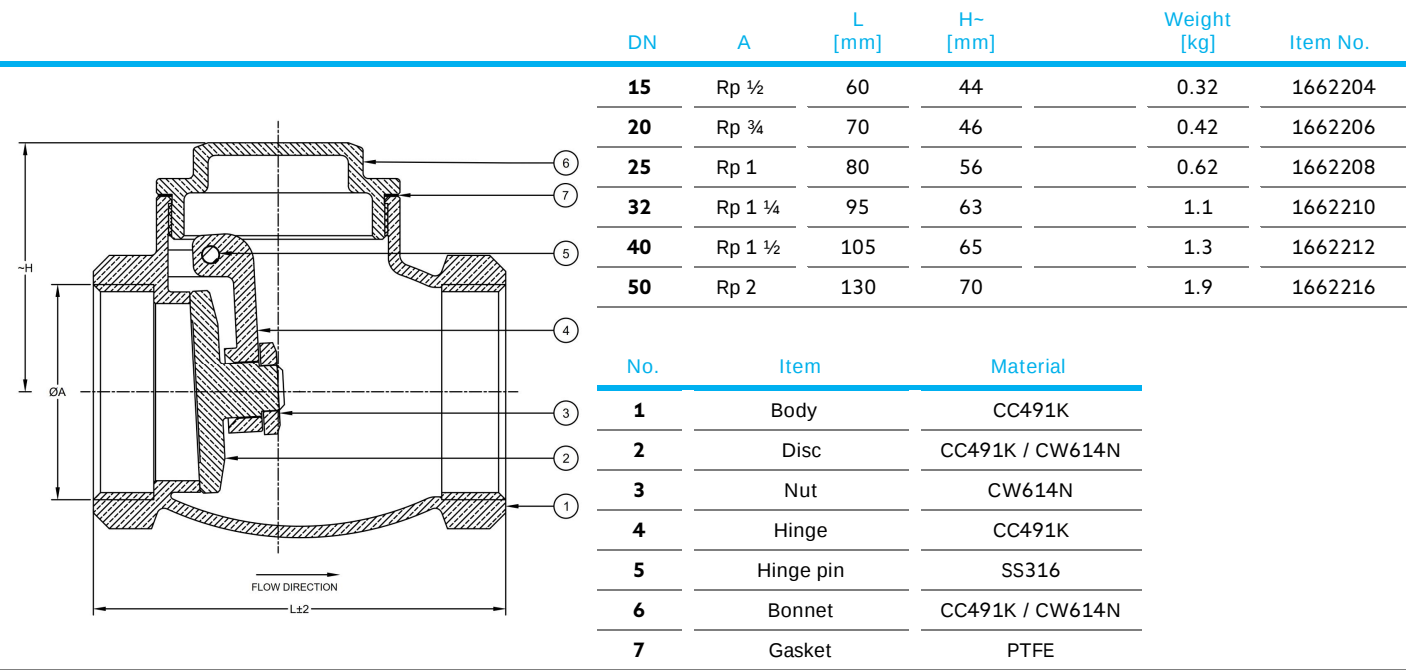

Flow chart

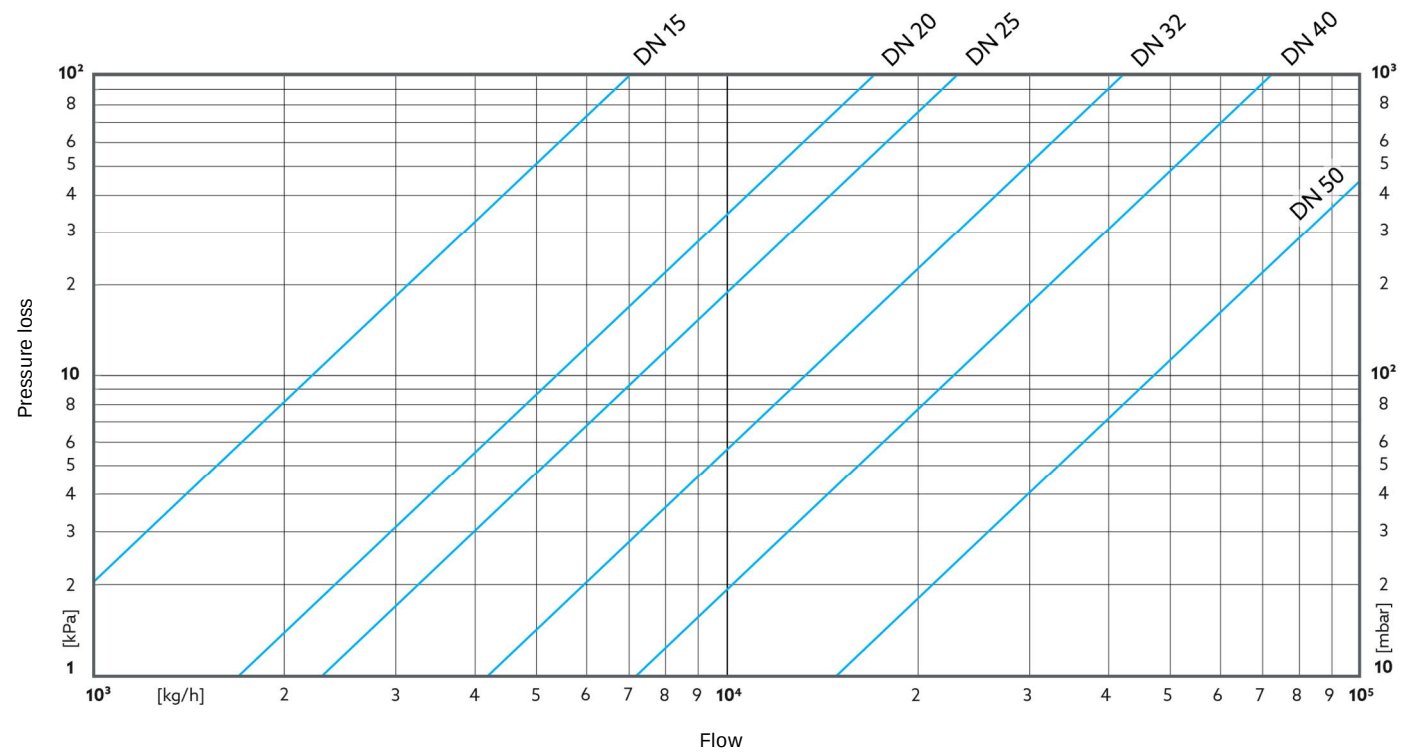

Subject to change • All rights reserved • © 2024 Oventrop GmbH & Co. KG
EN-05006-166220-DK-V2407 – February 2024