


Bronze Strainers

Internal threads PN 25

DN 15...50

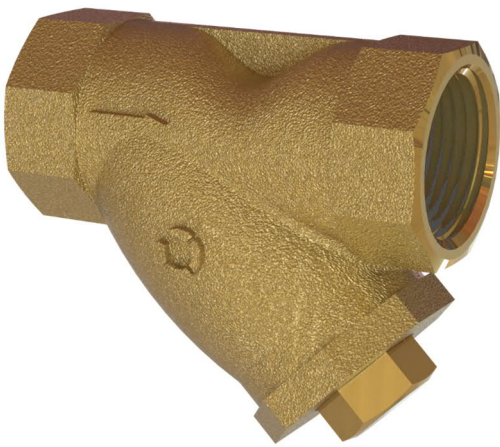


Threaded bronze strainers in sizes DN 15 to DN 50 for the installation in the supply or return of heating and cooling systems and potable water systems. With WRAS approval.

Specifications

Nominal size	DN 15 ... 50					
Versions	with internal threads to EN 10226 (BS 21)					
Operating temperature	-10 to 180 °C					
Operating pressure	PN 25					
Temperature / pressure relation	-10...100 °C 25 bar	...120°C 21.8 bar	...150°C 16.5 bar	...170°C 12.8 bar	...180°C 10.5 bar	
Medium	Heating and chilled water, potable water					
Kvs value per size	DN 15 4.5	DN 20 9	DN 25 16	DN 32 23	DN 40 30	DN 50 54


Dimensions, Item Numbers and Materials

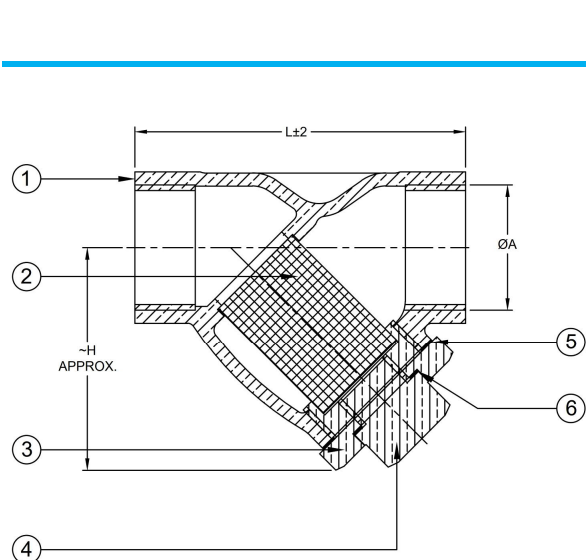

DN	A	L [mm]	H- [mm]	Weight [kg]	Item No.
15	Rp ½	60	41	0.23	1661204
20	Rp ¾	70	47	0.32	1661206
25	Rp 1	76	54	0.47	1661208
32	Rp 1 ¼	92	67	0.75	1661210
40	Rp 1 ½	105	75	1.1	1661212
50	Rp 2	125	89.5	1.5	1661216

No.	Item	Material
1	Body	CC491K
2	Screen	SS304
3	Bonnet	CC491K
4	Plug	CC491K
5	Packing 1	PTFE
6	Packing 2	PTFE

Flow chart

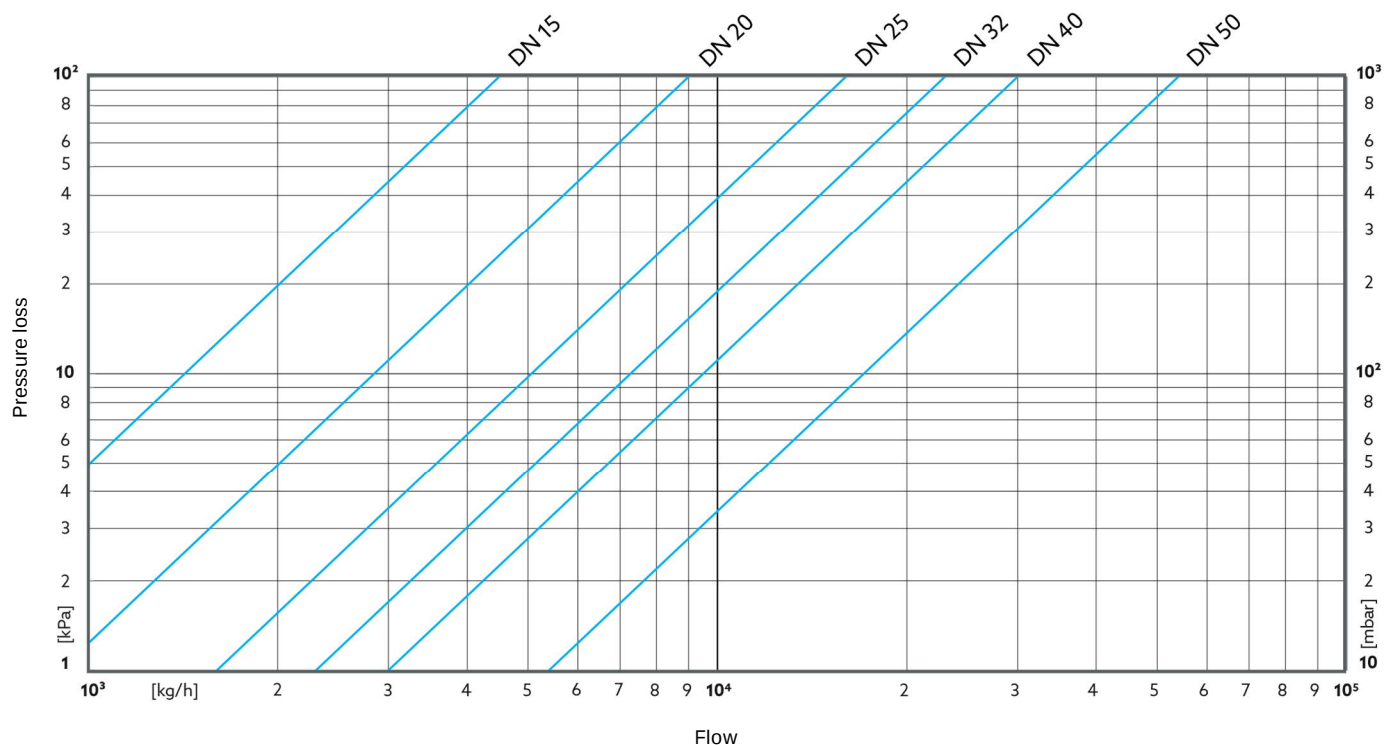

Subject to change • All rights reserved • © 2024 Oventrop GmbH & Co. KG
EN-05009-166120-DK-V2407 – February 2024